

Patch panels

FIBER-PATCH 1U, drawer, splice

Type: drawer

4_1_20_1

Composed of


- 19" rack
- Adjustable angle for backward adjustment (70 mm)

Description

- Anodised aluminium rack with numbered slots
- Pre-assembled
- Optional connectors and number of splices available

Application

- Indoors
- Junction and distribution boxes

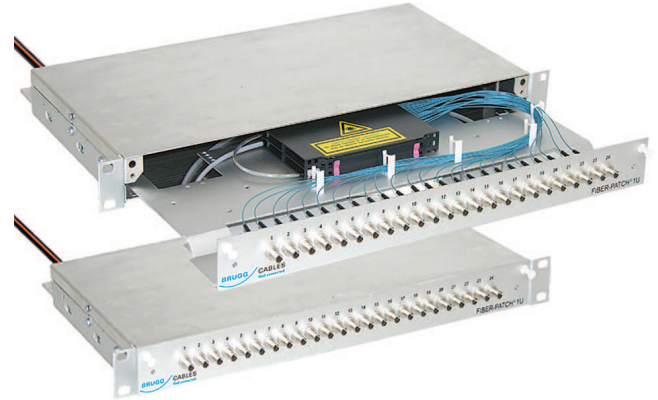

With connector singlemode APC

Connector type	Connector (max.)	Tray (max.)	Splices (max.)	Dimensions (l x h x d)	Weight kg
LC-D	6	3	36	483 x 44.5 x 220	1.9
LC-D	12	3	36	483 x 44.5 x 220	1.9
LSH	12	3	36	483 x 44.5 x 220	1.9
LSH	24	3	36	483 x 44.5 x 220	1.9
LSH-D	6	3	36	483 x 44.5 x 220	1.9
LSH-D	12	3	36	483 x 44.5 x 220	1.9
SC	12	3	36	483 x 44.5 x 220	1.9
SC	24	3	36	483 x 44.5 x 220	1.9

With connector singlemode PC

Connector type	Connector (max.)	Tray (max.)	Splices (max.)	Dimensions (l x h x d)	Weight kg
LC-D	6	3	36	483 x 44.5 x 220	1.9
LC-D	12	3	36	483 x 44.5 x 220	1.9
LSH	12	3	36	483 x 44.5 x 220	1.9
LSH	24	3	36	483 x 44.5 x 220	1.9
LSH-D	6	3	36	483 x 44.5 x 220	1.9
LSH-D	12	3	36	483 x 44.5 x 220	1.9
SC	12	3	36	483 x 44.5 x 220	1.9
SC	24	3	36	483 x 44.5 x 220	1.9
BFOC	12	3	36	483 x 44.5 x 220	1.9
BFOC	24	3	36	483 x 44.5 x 220	1.9
FC	12	3	36	483 x 44.5 x 220	1.9
FC	24	3	36	483 x 44.5 x 220	1.9

Patch panels

With connector multimode PC

Connector type	Connector (max.)	Tray (max.)	Splices (max.)	Dimensions (l x h x d)	Weight kg
LC-D	6	3	36	483 x 44.5 x 220	1.9
LC-D	12	3	36	483 x 44.5 x 220	1.9
LSH	12	3	36	483 x 44.5 x 220	1.9
LSH	24	3	36	483 x 44.5 x 220	1.9
LSH-D	6	3	36	483 x 44.5 x 220	1.9
LSH-D	12	3	36	483 x 44.5 x 220	1.9
SC	24	3	36	483 x 44.5 x 220	1.9
SC	12	3	36	483 x 44.5 x 220	1.9
BFOC	12	3	36	483 x 44.5 x 220	1.9
BFOC	24	3	36	483 x 44.5 x 220	1.9
FC	12	3	36	483 x 44.5 x 220	1.9
FC	24	3	36	483 x 44.5 x 220	1.9

LSH is equivalent to E-2000, which is a registered Tradename of the company DIAMOND SA.

BFOC is equivalent to ST, which is a registered Tradename from the company LUCENT Technologies.